

ADDENDUM NO. 3

June 27, 2023

This Addendum forms a part of the Contract Documents and modifies the original Bidding Documents dated June 1, 2023.

Acknowledge receipt of this Addendum (5 pages) in the space provided on the BID FORM. Failure to do so may subject the Bidder to disqualification.

The following items clarify, modify, change, delete from or add to the Contract Documents. When any paragraph, subparagraph, or sub-subparagraph thereof is modified or deleted by this Addendum, the unaltered provisions of that paragraph, subparagraph or sub-subparagraph shall remain in effect.

CLARIFICATIONS / GENERAL

1. PREBID QUESTION – Door schedule head and jamb details for Door 310,310.1, 314, 314.1. Refer to H7 & J7. Schedule indicated material as HM- Referenced detail to A602 H& J7 indicate aluminum storefront. Which material is correct?
 - A. Door frames for doors 310, 310.1, 314, & 314.1 shall be hollow metal. See revised door schedule A601 for frame type and updated head and jamb details.
2. PREBID QUESTION – Opening 325.1 is an exterior door. Should it be hollow metal instead of the wood door? The frame is detailed as an aluminum frame, but it has the material as hollow metal.
 - A. Opening 325.1 shall be an insulated hollow metal door. See revised door schedule A601 for frame type and updated head and jamb details.
3. PREBID QUESTION – The glass/Panel legend (drawing sheet A611) has IP for the insulated metal panels. There are no IP's on the frame elevation types only GL types. Is it safe to assume there are no metal panels?
 - A. There are no metal panels per sheet A611. See sheet A601 frame type (F7) for location of metal panels for signage.
4. PREBID QUESTION - Openings 315 & 316 are under hardware set #26 but they are not in the door schedule. Should they be wood doors with hollow metal frames?
 - A. See revised door schedule A601 for door type and frame elevations.
5. PREBID QUESTION - The wood door spec has wood transom & side panels on page 5 of section 082113. Can you confirm there aren't any since the transoms have the GL type shown on sheet A601.
 - A. Remove 082113- Flush Wood Doors section 2.5.C wood transom and side panels.

SPECIFICATIONS

1. SECTION 082113 – FLUSH WOOD DOORS:
 - A. REMOVE SECTION 2.5.C TRANSOM AND SIDE PANELS

DRAWINGS:

1. A601 – DOOR SCHEDULE & DETAILS:
 - A. REVISED DOOR SCHEDULE
 - B. NOTE CLARIFICATION ON FRAME ELEVATION (F7)
2. A800 - FFE – AREA A SCHEDULE NOTES:

EL1 Accessories:

 - A. Replace “bottom Mount-Plug Strip 24in Long” and “USB Charing Ports” with the aluminum back mounted power strip with 8-outlets (BenchDepot Model: A8-96). Replace one (1) outlet on power strip with (1) one USB charging port (BenchDepot Model: USBP) on each end of the power strip for a total of (2) two USB ports and six (6) outlets per power strip.
 - B. EL2 – No USB plugs on desk. Maintain bottom mount power plug strip.
3. P101 – PLUMBING FLOOR PLAN AREA A:
 - A. SEE ATTACHED SKETCH “A” INDICATING SANITARY DRAIN AND ASSOCIATED VTR FOR TWO (2) SINKS S-3.
4. P102 – PLUMBING FLOOR PLAN AREA B:
 - A. SEE ATTACHED SKETCH “B” INDICATING SANITARY DRAIN AND ASSOCIATED VTR FOR THREE (3) SINKS S-3.

END OF ADDENDUM

DOOR AND FRAME SCHEDULE												
OPENING NO./ DOOR MARK	DOOR				FIRE RATING	FRAME				THRESH	HWDRE SET	KEYNOTES
	ELEV	PAIR	MATL	WIDTH		HEIGHT	ELEV	MATL	HEAD			
FIRST FLOOR												
310	FG	--	WD	3'-0"	7'-0"	F9	HM	H6	J5	T1	18	ACCESS CONTROL
310.1	FG	--	WD	3'-0"	7'-0"	F9	HM	H6	J5	T1	28	
310.2	HS	--	WD	3'-0"	7'-0"	F2	HM	H5	J5	T1	6	
310.3	F	PAIR	WD	6'-0"	7'-0"	F2	HM	H5	J5	T1	31	
310.4	F	--	WD	3'-0"	7'-0"	F2	HM	H5	J5	T1	23	
310.5	F	--	WD	3'-0"	7'-0"	F2	HM	H5	J5	T1	23	
310.6	F	--	WD	3'-0"	7'-0"	F3	HM	H5	J5	T1	13	NEW FRAME IN EXIST'G OPENING ACCESS CONTROL
310.7	NT	PAIR	WD	6'-8"	6'-8"	F2	HM	H5	J5	T1	27	RECESSED ELECTROMAGNETIC DOOR HOLDER
311	FG	--	WD	3'-0"	7'-0"	F8	HM	H6	J5	T1	18	ACCESS CONTROL
311.1	F	--	WD	3'-0"	7'-0"	F3	HM	H5	J5	T1	6	NEW FRAME IN EXIST'G OPENING.
312	F	--	WD	3'-0"	7'-0"	F2	HM	H5	J5	T1	32	
312.1	NT	--	WD	3'-0"	7'-0"	F2	HM	H5	J5	T1	32	
312.2	NT	--	WD	3'-0"	7'-0"	F2	HM	H5	J5	T1	32	
312.3	NT	--	WD	3'-0"	7'-0"	F2	HM	H5	J5	T1	11	
312.4	NT	--	WD	3'-0"	7'-0"	F2	HM	H5	J5	T1	11	
313	NT	--	WD	3'-0"	7'-0"	F2	HM	H5	J5	T1	13	ACCESS CONTROL
314	NT	--	WD	3'-0"	7'-0"	F9	HM	H6	J5	T1	25	
314.1	NT	--	WD	3'-0"	7'-0"	F9	HM	H6	J5	T1	25	
315	AF/IF	--	WD	4'-6"	7'-0"	F4A	HM	H6	J5	T1	28	36" ACTIVE LEAF & 18" INACTIVE LEAF ACCESS CONTROL
315.1	F	--	WD	3'-0"	7'-0"	F2	HM	H5	J5	T1	11	
316	AF/IF	--	WD	4'-6"	7'-0"	F4B	HM	H6	J5	T1	28	36" ACTIVE LEAF & 18" INACTIVE LEAF ACCESS CONTROL
316.1	NT	PAIR	WD	6'-0"	7'-0"	F2	HM	H5	J5	T1	3	
317	FG	--	WD	3'-0"	7'-0"	F5	HM	H6	J5	T1	13	ACCESS CONTROL
317.1	HG	--	WD	3'-0"	7'-0"	F2	HM	H5	J5	T1	6	
318	F	--	WD	3'-0"	6'-8"	F2	HM	H5	J5	T1	23	
318.1	F	--	WD	3'-0"	6'-8"	EX	HM	EX	EX	T1	20	EXISTING DOOR TO REMAIN
318.2	F	--	WD	3'-0"	6'-8"	F2	HM	H5	J5	T1	23	
318.3	F	--	WD	2'-6"	7'-0"	EX	EX	EX	EX	T1	11	
319	NT	--	WD	3'-0"	7'-0"	F7	HM	H5	J5	T1	13	ACCESS CONTROL
319.1	NT	--	WD	3'-0"	7'-0"	F2	HM	H5	J5	T1	11	
319.2	NT	--	WD	3'-0"	7'-0"	F2	HM	H5	J5	T1	7	
322	NT	PAIR	WD	6'-0"	7'-0"	F6	HM	H6	J5	T1	9	ACCESS CONTROL
322.1	NT	--	WD	3'-0"	7'-0"	F2	HM	H5	J5	T2	7	
322.2	HG	--	WD	3'-0"	7'-0"	F2	HM	H5	J5	T2	6	
322.3	FG	--	WD	4'-6"	7'-0"	F2	HM	H5	J5	T3	5	36" ACTIVE LEAF NARROW LEAF & 18" INACTIVE LEAF SOLID
323	NT	PAIR	WD	6'-0"	7'-0"	F6	HM	H6	J5	T1	9	ACCESS CONTROL
323.1	NT	--	WD	3'-0"	7'-0"	F2	HM	H5	J5	T1	7	
323.3	X	--	--	3'-0"	7'-0"	F2	EX	EX	EX	--	10	EXISTING FRAME TO REMAIN REMOVE DOOR
323.4	NT	PAIR	WD	6'-0"	7'-0"	F2	HM	H5	J5	T1	3	
324	NT	PAIR	WD	6'-0"	7'-0"	F6	HM	H6	J5	T1	9	ACCESS CONTROL
324.1	NT	--	WD	3'-0"	7'-0"	F2	HM	H5	J5	T1	7	
324.2	NT	--	WD	3'-0"	7'-0"	F2	HM	H5	J5	T1	11	
324.3	NT	PAIR	WD	6'-0"	7'-0"	F2	HM	H5	J5	T1	3	
325	NT	--	WD	3'-0"	7'-0"	F2	HM	H5	J5	T1	13	ACCESS CONTROL
325.1	AF/IF	PAIR	HM	4'-6"	7'-0"	F2	HM	H2	J2	T1	4	36" ACTIVE LEAF & 18" INACTIVE LEAF ACCESS CONTROL
327	FG	PAIR	WD	6'-0"	7'-0"	F2	HM	H5	J5	T1	14	
328	NT	--	WD	2'-10"	7'-0"	F7	HM	H5	J5	T1	13	ACCESS CONTROL
328.1	NT	--	WD	3'-0"	7'-0"	F2	HM	H5	J5	T1	6	
328.2	NT	--	WD	3'-0"	7'-0"	F2	HM	H5	J5	T1	11	
329	NT	--	WD	3'-0"	7'-0"	F2	HM	H5	J5	T1	7	
329.1	NT	--	WD	3'-0"	7'-0"	F2	HM	H5	J5	T1	11	
329.3	F	--	HM	4'-6"	7'-0"	F2	HM	H5	J5	T1	5	
330	NT	PAIR	WD	7'-0"	6'-8"	F2	HM	H2	J2	T1	27	RECESSED ELECTROMAGNETIC DOOR HOLDER
331	EX	--	--	3'-0"	6'-8"	EX	EX	EX	EX	T1	22	EXISTING DOOR TO REMAINACCESS CONTROL
331.1	EX	--	--	3'-0"	6'-8"	EX	EX	EX	EX	T1	22	EXISTING DOOR TO REMAINACCESS CONTROL
331.2	EX	--	--	3'-0"	6'-8"	F2	HM	EX	EX	T1	20	EXISTING DOOR TO REMAIN
331.3	EX	--	--	3'-0"	6'-8"	F2	HM	EX	EX	T1	21	EXISTING DOOR TO REMAIN
332	NT	--	WD	3'-0"	7'-0"	F2	HM	H2	J2	T1	18	ACCESS CONTROL
332.1	NT	--	WD	3'-0"	7'-0"	F2	HM	H5	J5	T1	13	ACCESS CONTROL
332.2	EX	--	--	3'-0"	6'-8"	F2	HM	EX	EX	T1	19	EXISTING DOOR TO REMAIN
332.3	EX	--	--	3'-0"	6'-8"	F2	HM	EX	EX	T1	20	EXISTING DOOR TO REMAIN
332.4	EX	--	--	3'-0"	6'-8"	F2	HM	EX	EX	T1	20	EXISTING DOOR TO REMAIN
332.7	F	PAIR	HM	6'-0"	7'-0"	F2	HM	H5	J5	T1	3	
334	EX	--	--	3'-0"	6'-8"	EX	EX	EX	EX	--	10	EXISTING FRAME TO REMAIN REMOVE DOOR
335	EX	--	--	3'-0"	6'-8"	EX	EX	EX	EX	--	10	EXISTING FRAME TO REMAIN REMOVE DOOR

DOOR AND FRAME SCHEDULE - ALUMINUM												
OPENING NO./ DOOR MARK	DOOR				FIRE RATING	FRAME				HWDRE SET	KEYNOTES	
	ELEV	PAIR	MATL	WIDTH		HEIGHT	ELEV	MATL	HEAD			JAMB
FIRST FLOOR												
309	SF	--	AL	3'-0"	8'-8"	SX2	AL	H7	J7	T3	29	ACCESS CONTROL
309.1	SF	--	AL	3'-0"	8'-8"	SX2	AL	H7	J7	T3	30	
312.5	F	--	AL	4'-6"	7'-0"	SX3	AL	H3	J3	T3	4	36" ACTIVE LEAF & 18" INACTIVE LEAF/ ACCESS CONTROL
314.2	SF	--	AL	3'-0"	7'-0"	SX1	AL	H3	J3	T3	24	ACCESS CONTROL
320	SF	PAIR	AL	6'-0"	7'-0"	SX4	AL	H1	J1	T3	15	ACCESS CONTROL
321	F	PAIR	AL	6'-0"	7'-0"	SX4	AL	H1	J1	T3	8	ACCESS CONTROL
322.4	NT	--	AL	3'-0"	7'-0"	SX4	AL	H1	J1	T1	1	ACCESS CONTROL
323.5	NT	--	AL	3'-0"	7'-0"	SX4	AL	H1	J1	T3	1	ACCESS CONTROL
324.7	NT	--	AL	3'-0"	7'-0"	SX4	AL	H1	J1	T3	1	ACCESS CONTROL
326	FG	PAIR	AL	6'-0"	7'-0"	SX4	AL	H1	J1	T3	12	ACCESS CONTROL
329.4	NT	--	AL	3'-0"	7'-0"	SX4	AL	H1	J1	T3	1	ACCESS CONTROL
330.1	SF	--	AL	6'-0"	7'-0"	SX3	AL	H9	J9	T3	15	ACCESS CONTROL
330.2	SF	--	AL	5'-0"	7'-0"	SX3	AL	H9	J9	T3	15	ACCESS CONTROL
332.5	NT	--	AL	3'-0"	7'-0"	SX4	AL	H1	J1	T3	1	ACCESS CONTROL
333	NT	--	AL	3'-0"	7'-0"	SX4	AL	H1	J1	T3	1	ACCESS CONTROL


DOOR AND FRAME SCHEDULE - OVERHEAD										
WT	DOOR				FIRE RATING	FRAME			KEYNOTES	
	ELEV	PAIR	MATL	WIDTH		ELEV	MATL	HARDWARE SET		
FIRST FLOOR										
313.1	OH-N	--	--	8'-0"	7'-0"	MANUF	MANUF	2		
322.5	OH-N	--	--	8'-0"	7'-0"	MANUF	MANUF	2		
323.2	OH-N	--	--	8'-0"	7'-0"	MANUF	MANUF	2		
323.6	OH-S	--	--	16'-0"	10'-0"	MANUF	MANUF	2		
323.7	OH-S	--	--	12'-0"	10'-0"	MANUF	MANUF	2		
323.8	OH-S	--	--	12'-0"	10'-0"	MANUF	MANUF	2		
324.3	OH-N	--	--	12'-0"	10'-0"	MANUF	MANUF	2		
324.4	OH-S	--	--	12'-0"	10'-0"	MANUF	MANUF	2		
324.5	OH-S	--	--	12'-0"	10'-0"	MANUF	MANUF	2		
324.6	OH-S	--	--	12'-0"	10'-0"	MANUF	MANUF	2		
329.2	OH-N	--	--	8'-0"	7'-0"	MANUF	MANUF	2		
329.5	OH-N	--	--	8'-0"	7'-0"	MANUF	MANUF	2		
332.6	OH-N	--	--	10'-0"	10'-0"	MANUF	MANUF	2		
333.1	OH-N	--	--	16'-0"	10'-0"	MANUF	MANUF	2		
333.2	OH	--	--	16'-0"	10'-0"	MANUF	MANUF	2		


SIGNAGE SCHEDULE			
OPENING NO./ DOOR MARK	ROOM NO.	SIGNAGE TYPE	VERBIAGE
FIRST FLOOR			
309	A	EXIT	
309.1	--	--	
310	--	--	
310.1	--	--	
310.2	B	VERIFY WITH OWNER	
310.3	B	STORAGE	
310.4	C	RESTROOM	
310.5	C	RESTROOM	
310.6	B	VERIFY WITH OWNER	
310.7	--	--	
311	--	--	
311.1	--	--	
312	--	--	
312.1	--	--	
312.2	--	--	
312.3	--	--	
312.4	--	--	
312.5	--	--	
313	B	VERIFY WITH OWNER	

SIGNAGE SCHEDULE			
OPENING NO./ DOOR MARK	ROOM NO.	SIGNAGE TYPE	VERBIAGE
FIRST FLOOR			
313.1	--	--	
314	B	VERIFY WITH OWNER	
314.1	B	VERIFY WITH OWNER	
314.2	--	--	
315	--	--	
315.1	--	--	
316	--	--	
316.1	--	--	
317	--	--	
317.1	--	--	
318	C	RESTROOM	
318.2	C	RESTROOM	
319	--	--	
319.1	--	--	
319.2	--	--	
320	A	EXIT	
321	--	--	
322	--	--	
322.1	--	--	
322.2	--	--	
322.3	--	--	

SIGNAGE SCHEDULE			
OPENING NO./ DOOR MARK	ROOM NO.	SIGNAGE TYPE	VERBIAGE
FIRST FLOOR			
322.4	--	--	
322.5	--	--	
323	--	--	
323.1	--	--	
323.2	--	--	
323.3	--	--	
323.4	--	--	
323.5	--	--	
323.6	--	--	
323.7	--	--	
323.8	--	--	
323.9	--	--	
324	--	--	
324.1	--	--	
324.2	--	--	
324.3	--	--	
324.4	--	--	
324.5	--	--	
324.6	--	--	
324.7	--	--	
324.8	--	--	
325	B	WELDING LAB	
325.1	--	--	
325.2	--	--	

SIGNAGE SCHEDULE			
SIGNAGE			
OPENING NO. DOOR MARK	TYPE	ROOM NO.	VERBIAGE
326	A		EXIT
327	--	--	--
328	--	--	--
328.1	--	--	--
328.2	--	--	--
329	--	--	--
329.1	--	--	--
329.2	--	--	--
329.3	--	--	--
329.4	--	--	--
329.5	--	--	--
330	--	--	--
330.1	--	--	--
330.2	A		EXIT
332	--	--	--
332.1	--	--	--
332.2	--	--	--
332.3	--	--	--
332.4	--	--	--
332.5	--	--	--
332.6	--	--	--
332.7	--	--	--
333	--	--	--
333.1	--	--	--
333.2	--	--	--

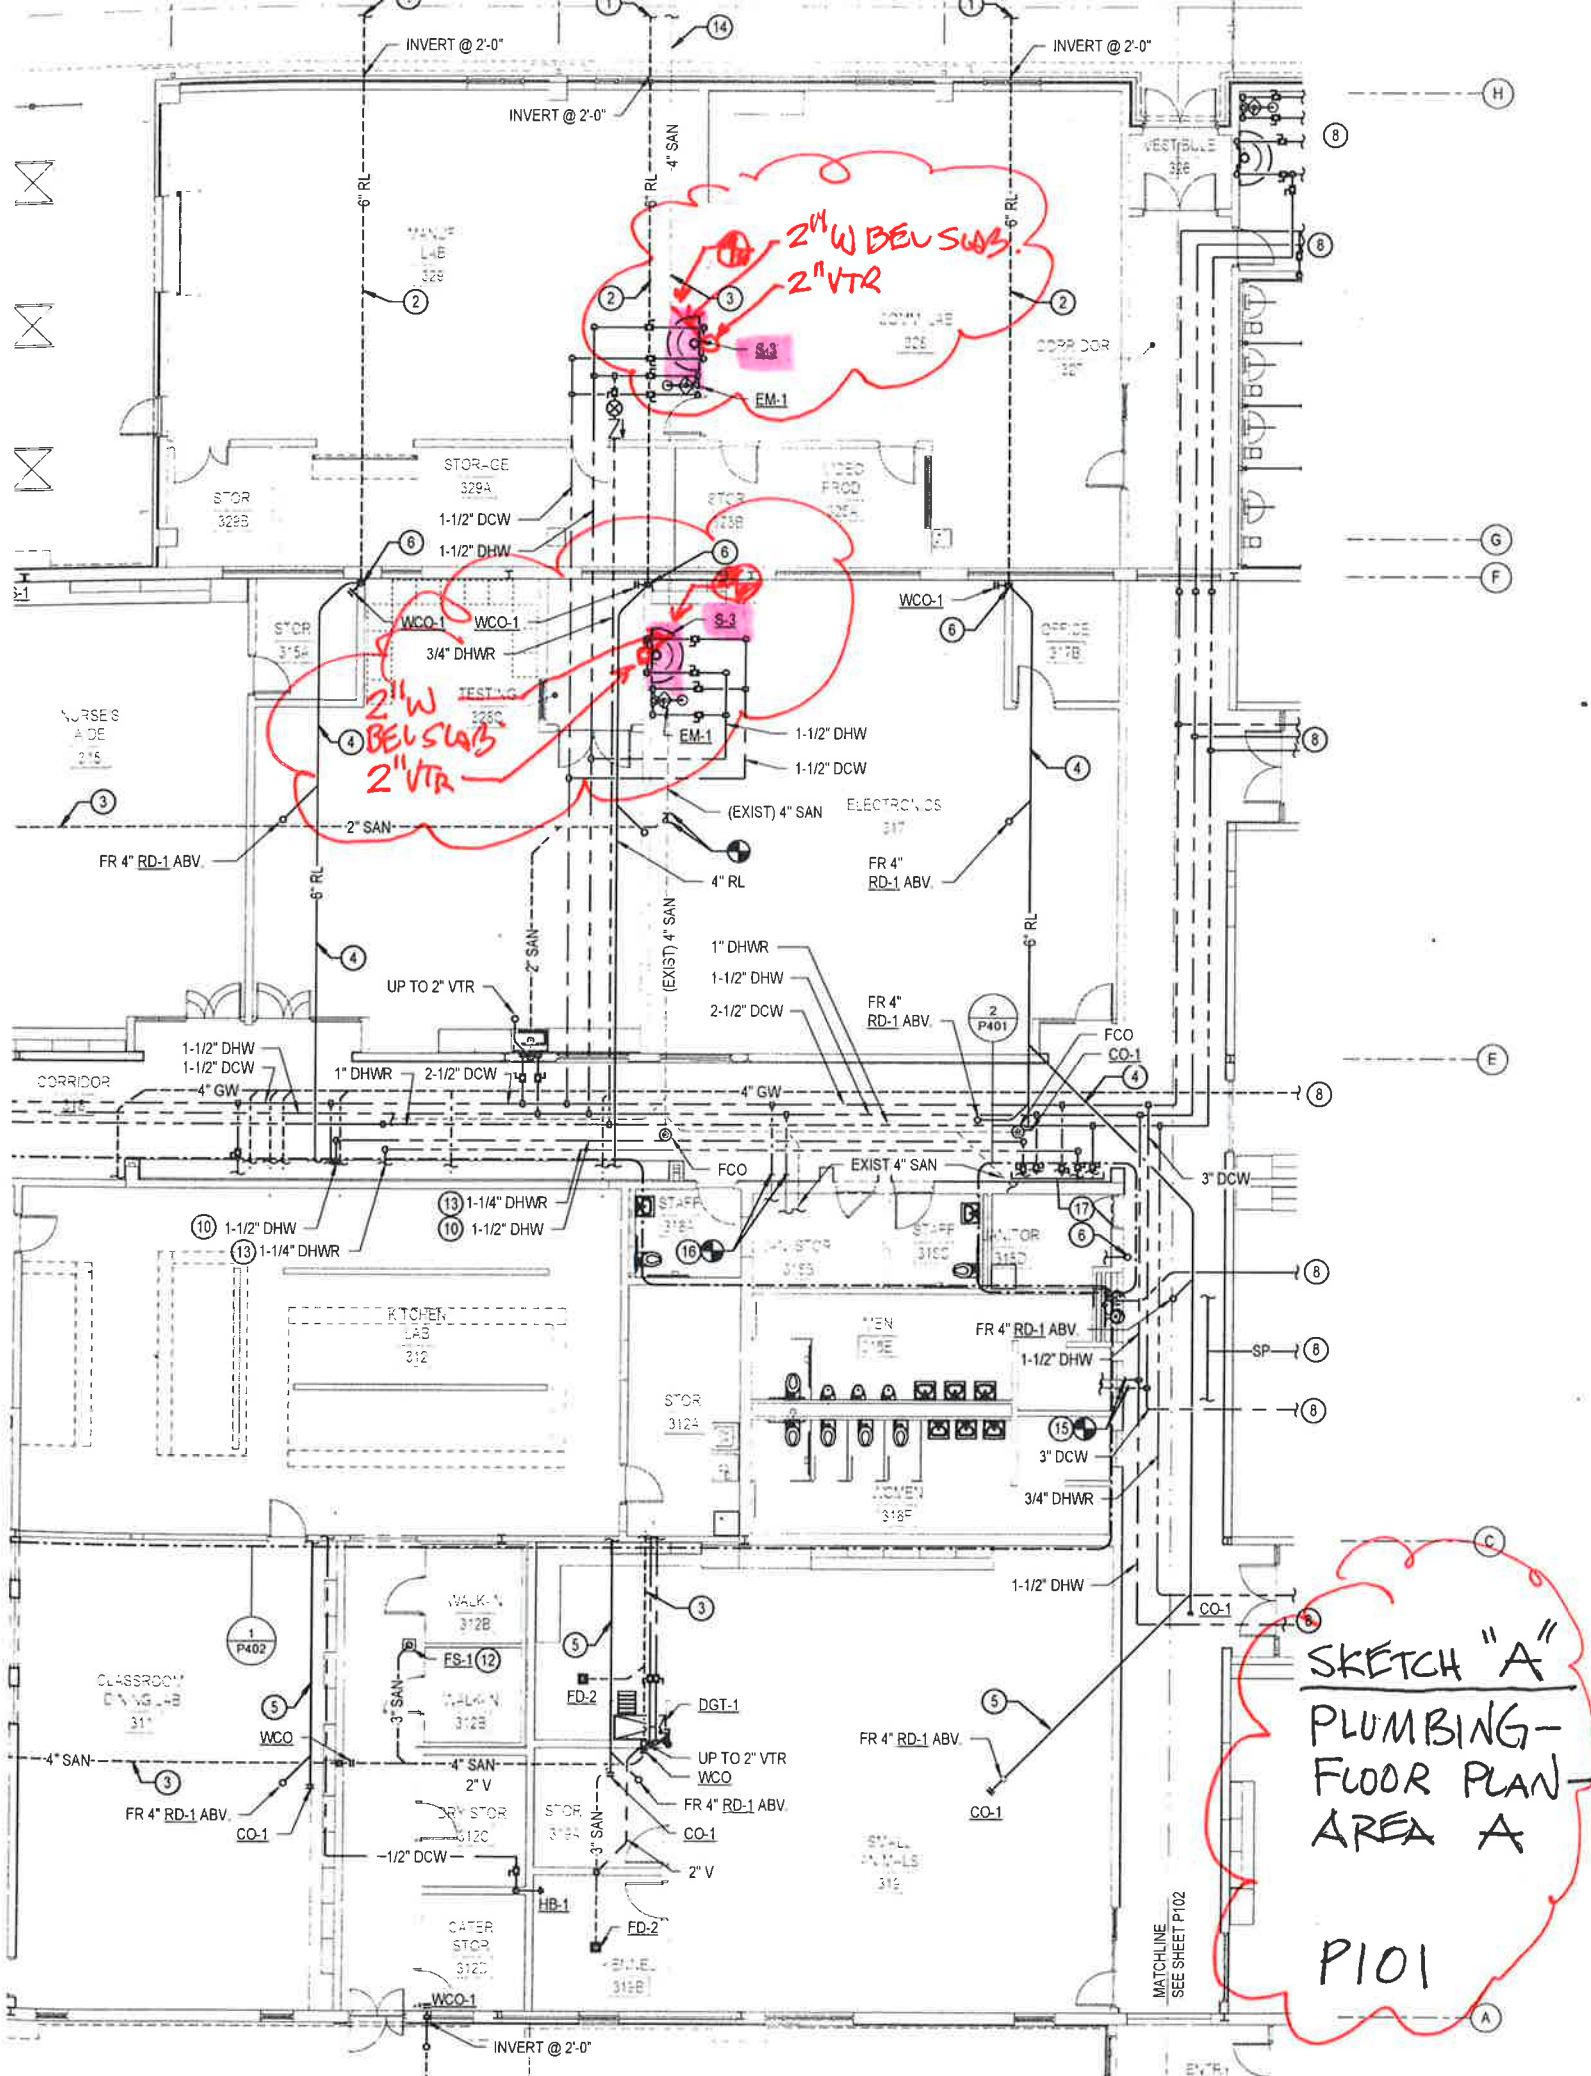

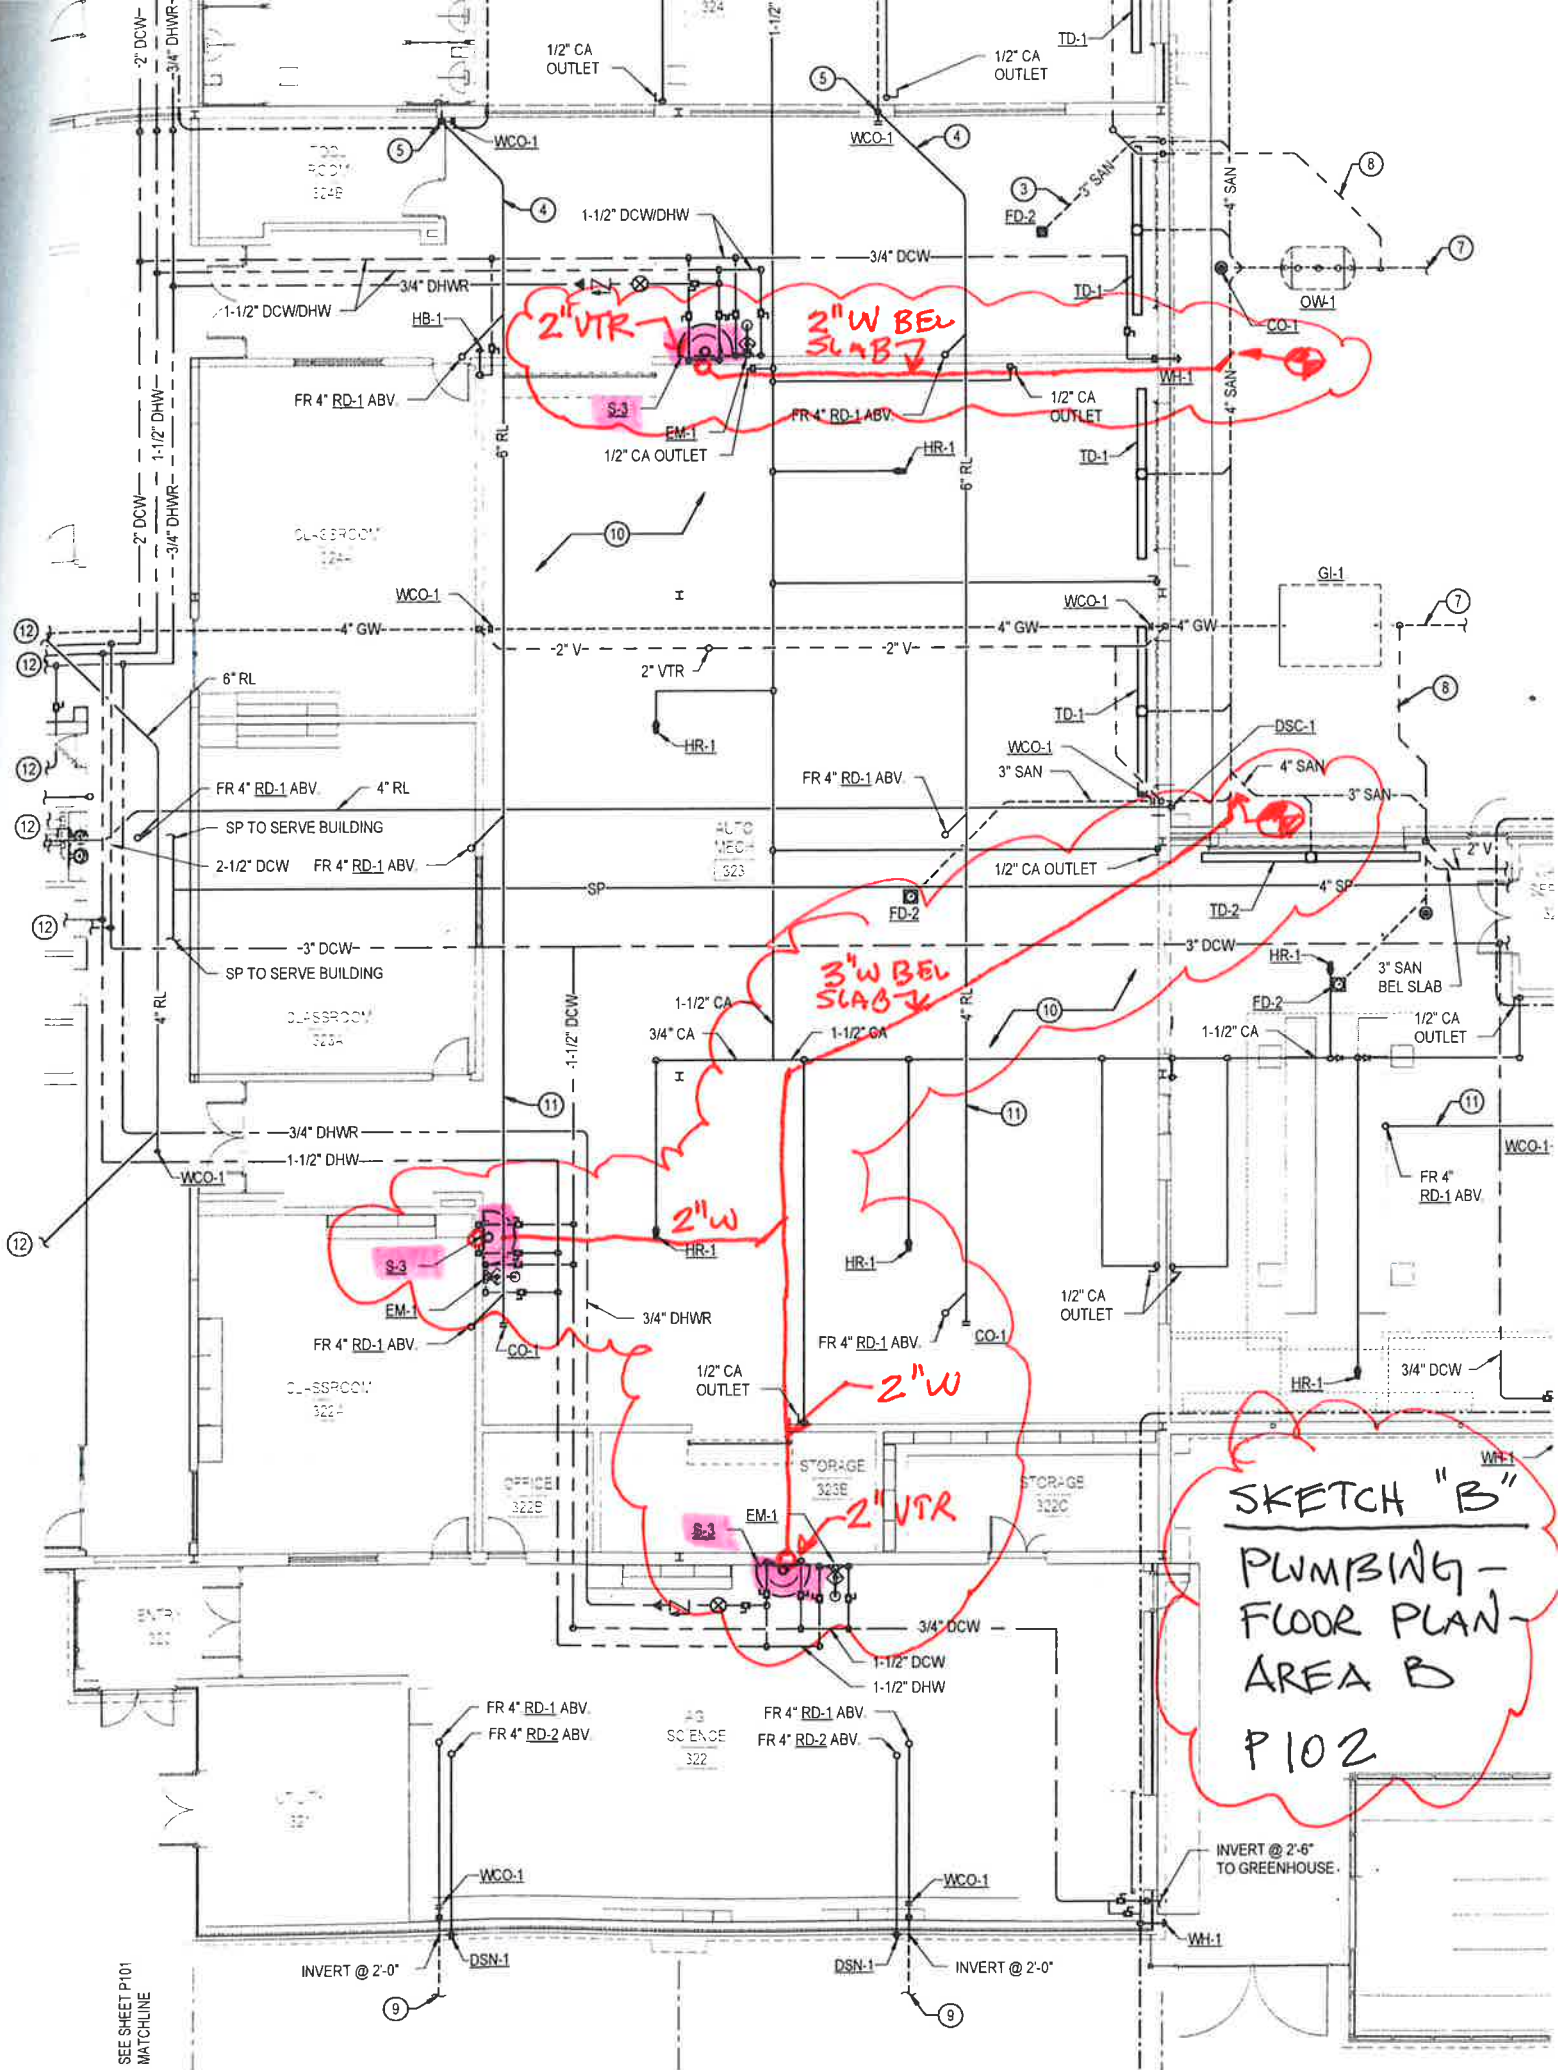

SKETCH "B"
PLUMBING -
FLOOR PLAN -
AREA B
P102

SEE SHEET P101
MATCHLINE